

Accessories

Type BSTK (plastic dummy plug)



-30 to +100 °C
Short periods +130 °C



Polyamide



HB




IP 54

IP 65 with additional sealing ring type OR

Dummy plug made of plastic with metric or Pg thread.

IP 65 protection rating is achieved using additional O-ring type OR.
(O-ring not included in delivery)

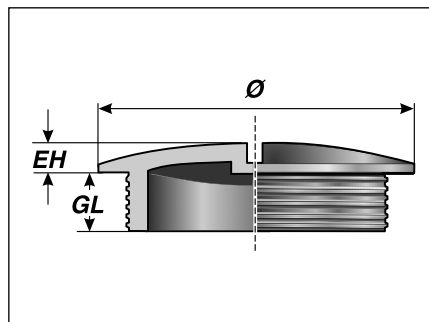

BSTK

Type	Order no.	Colour	External thread	EH mm	GL mm	Ø mm	Pack qty
Metric version							
BSTK-M12x1.5	83726410	Grey	M12x1.5	3.0	6.0	15.0	100
BSTK-M12x1.5	83726450	Black	M12x1.5	3.0	6.0	15.0	100
BSTK-M16x1.5	83726412	Grey	M16x1.5	3.5	6.0	20.0	100
BSTK-M16x1.5	83726452	Black	M16x1.5	3.5	6.0	20.0	100
BSTK-M20x1.5	83726414	Grey	M20x1.5	4.0	6.0	24.0	100
BSTK-M20x1.5	83726454	Black	M20x1.5	4.0	6.0	24.0	100
BSTK-M25x1.5	83726416	Grey	M25x1.5	4.5	8.0	30.0	100
BSTK-M25x1.5	83726456	Black	M25x1.5	4.5	8.0	30.0	100
BSTK-M32x1.5	83726418	Grey	M32x1.5	4.5	8.0	37.0	100
BSTK-M32x1.5	83726458	Black	M32x1.5	4.5	8.0	37.0	100
BSTK-M40x1.5	83726420	Grey	M40x1.5	5.5	8.0	46.0	50
BSTK-M40x1.5	83726460	Black	M40x1.5	5.5	8.0	46.0	50
BSTK-M50x1.5	83726422	Grey	M50x1.5	5.5	10.0	56.0	50
BSTK-M50x1.5	83726462	Black	M50x1.5	5.5	10.0	56.0	50
BSTK-M63x1.5	83726424	Grey	M63x1.5	4.5	12.0	70.0	50
BSTK-M63x1.5	83726464	Black	M63x1.5	4.5	12.0	70.0	50

Pg version, see next page

[illegible]