


End cap

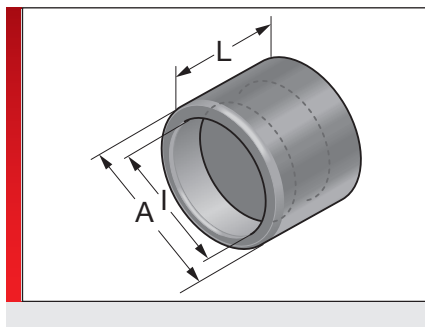

PRODUCT INFORMATION

The type EK end cap is made of specially modified polyamide and mounted on the ends of the cable protection conduits. The end cap is designed as an edge protector so that exiting cables cannot be damaged and the visual effect of the installation is improved.

SPECIFICATIONS



Mod. polyamide PA 6



-40 – 115 °C transient / short term
150 °C



V2 self-extinguishing



Type	Order No.	Colour	Suitable for Murrflex	A mm	I mm	L mm	Pack qty.
EK-M12/P9	83723552	Black	M10/P7 ; M12/P9	15.00	7.80	20.00	50
EK-M16/P11	83723554	Black	M16/P11	17.80	10.30	20.00	50
EK-M20/P16	83723556	Black	M20/P16(S)	23.20	14.30	21.00	50
EK-M25/P21	83723558	Black	M25/P21(S)	30.50	20.80	22.00	25
EK-M32/P29	83723560	Black	M32/P29(S)	36.50	26.80	22.00	25
EK-M40/P36	83723562	Black	M40/P36(S)	44.50	33.80	25.00	25
EK-M50/P48	83723564	Black	M50/P48(S)	56.50	45.80	25.00	10
EK-M12/P9	83723512	Grey	M10/P7 ; M12/P9	15.00	7.80	20.00	50
EK-M16/P11	83723514	Grey	M16/P11	17.80	10.30	20.00	50
EK-M20/P16	83723516	Grey	M20/P16(S)	23.20	14.30	21.00	50
EK-M25/P21	83723518	Grey	M25/P21(S)	30.50	20.80	22.00	25
EK-M32/P29	83723520	Grey	M32/P29(S)	36.50	26.80	22.00	25
EK-M40/P36	83723522	Grey	M40/P36(S)	44.50	33.80	25.00	25
EK-M50/P48	83723524	Grey	M50/P48(S)	56.50	45.80	25.00	10

MATERIAL PROPERTIES



Mod. polyamide PA 6

THERMAL PROPERTIES



Temperature / temperature range
-40 – 115 °C transient / short term 150 °C

FIRE BEHAVIOUR



Fire classification
V2 self-extinguishing

End cap

CONFORMITY

RoHS

RoHS (EC Directive 2002/95/EC)

All details given in our sales material prospectuses and catalogues as well as the information available online are based on our current knowledge of the products described.

The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the product described.

A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information.

All information with respect to the chemical and physical properties of Murrplastik products as well as application advice given verbally, in writing or by tests, is given to the best of our knowledge.

This does not free the purchaser of carrying out their own inspections and tests in order to determine the suitability of a product for a specific purpose.

Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information.

Murrplastik accepts no liability for damage caused as a result of using our products.

Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services.

Our General Terms and Conditions apply.

© Murrplastik Systemtechnik GmbH • proID_66642~20160815~890283~suv_ek